



—Transparent film for FPC materials— “C60HT & L72HT series”

Example of use



- Head mounted display (for VR)
- Digital signage
- For automobile application



Characteristics


- Arisawa transparent Coverlay and FCCL are durable to reflow process at 260°C although these are transparent materials. Maintaining its transparency after heat application.
- Coverlay “C60HT” is workable with low temperature from 130°C.

Product structure

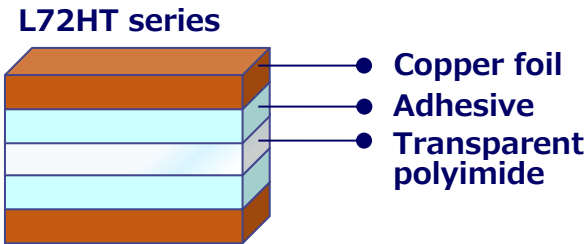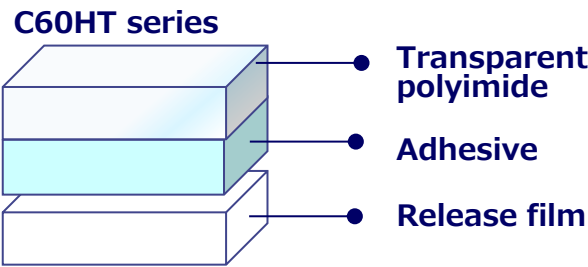

Single-sided structure is also available.

Product Properties

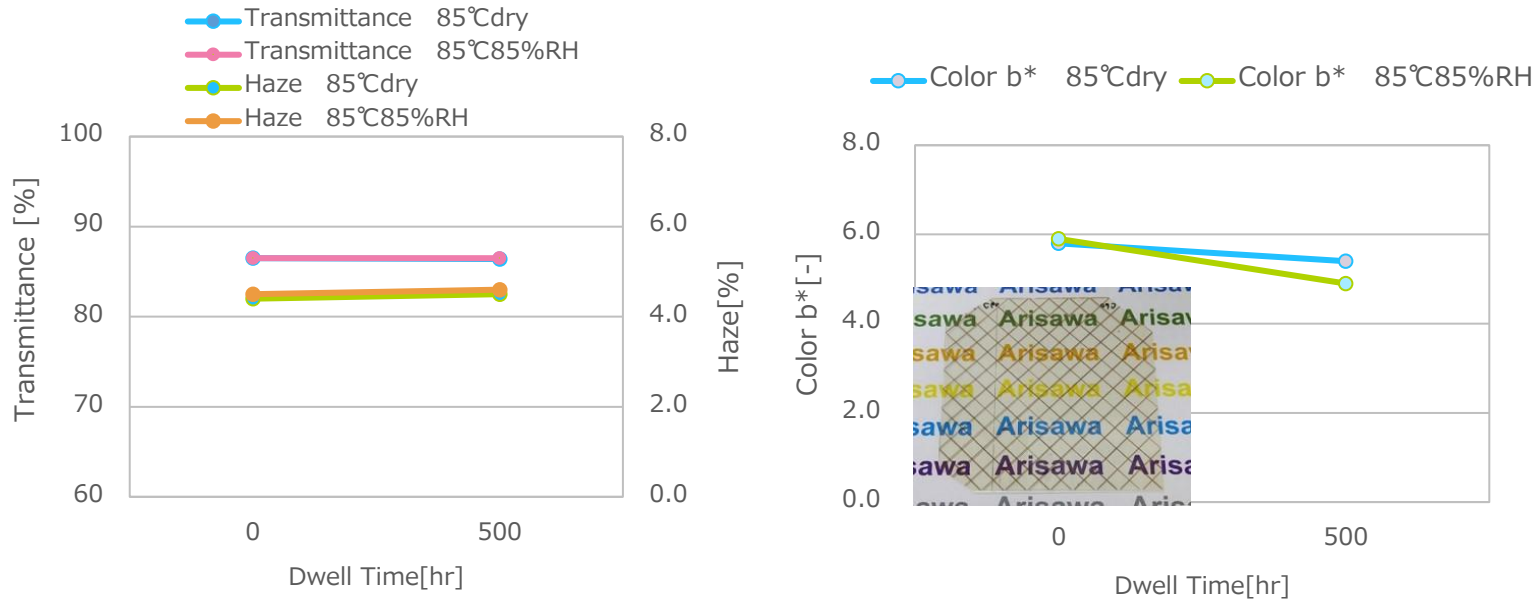

Sample making conditions : Pressing at 160°C×60min× 3 MPa

Test sample structure : C60HT 50μm / L72HT 45μm (Cu foil is entirely etched) / C60HT 50μm



Sales & Marketing Department
Tokyo Head Office: Yanagibashi 2-12-5, Taito-ku, Tokyo 111-0052, Japan Tel : +81-3-3861-1110
Kansai: Tsumori 3-7-27, Nishinari-ku, Osaka 557-0062, Japan Tel : +81-6-4703-3168

The data in this document are measured values, not for guaranteed.