



—Transparent film for FPC materials— “C60KT & L71KT”

Example of use



- Head mounted display (for VR)
- Digital signage
- For automobile application



Characteristics



- Arisawa transparent Coverlay and FCCL are durable to reflow process at 240°C even transparent materials, and keeping its transparency after heat application.
- Coverlay “C60KT” is workable with low temperature from 130°C.

Product structure

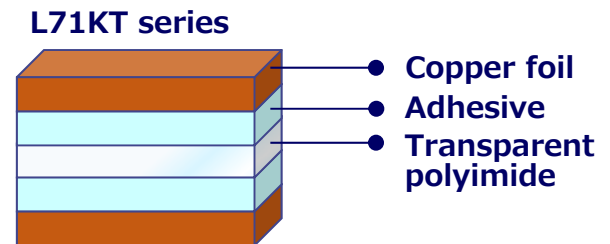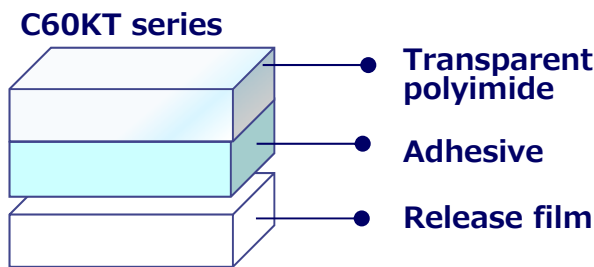

Single-sided structure is also available.

Product Properties

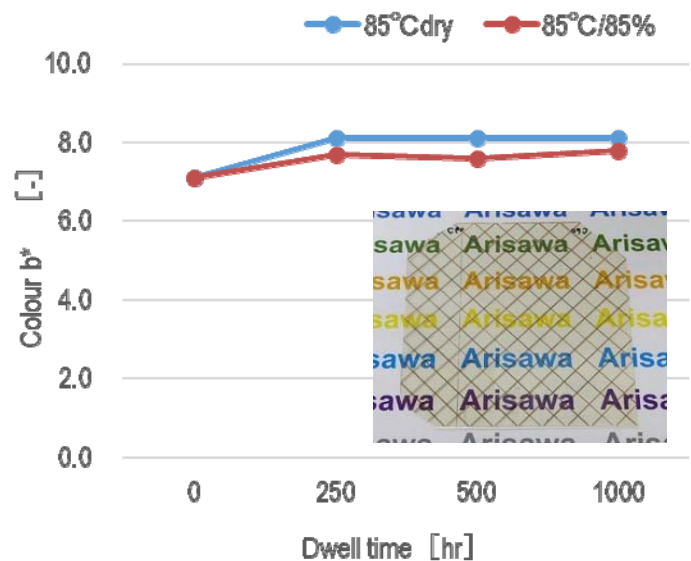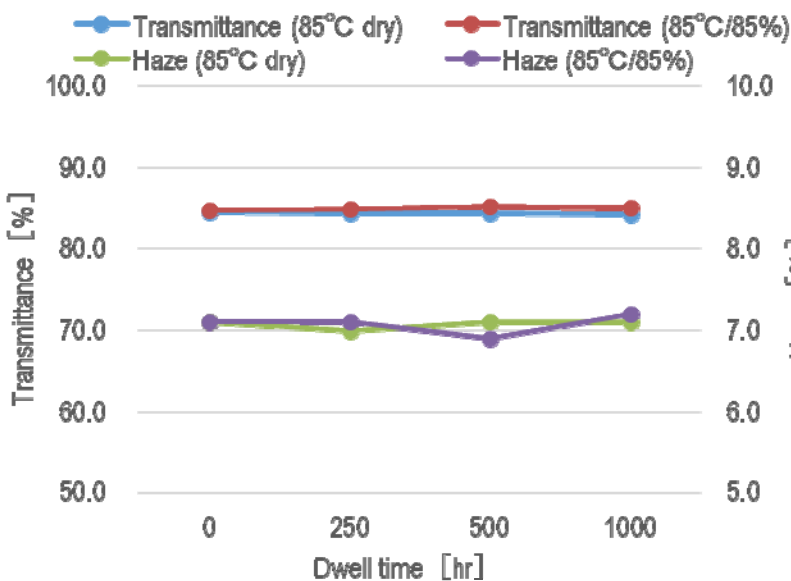

Sample making condition : Pressing at 160°C×60min×3 MPa

Test sample structure : C60KT 50µm / L71KT 45µm (Cu foil is entirely etched) / C60KT 50µm



Sales & Marketing Department

Tokyo Head Office: Yanagibashi 2-12-5, Taito-ku, Tokyo 111-0052, Japan Tel : +81-3-3861-1110

Kansai: Tsumori 3-7-27, Nishinari-ku, Osaka 557-0062, Japan Tel : +81-6-4703-3168

The data in this document are measured values, not for guaranteed.